


Generator set
Sound-proof type
GMS250CS

SPECIFICATIONS



1 Standards & Conditions

Design Standards

The designs and the productions are in conformity with:

- Conformance Europeenne (CE)
- China Compulsory Certification (CCC)
- ISO8528-5:2005
- GB/T2820.5-2009

Environmental Operating Conditions

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 50°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 80%.
- Altitude: Below one thousand (1000) meters.

Factory Inspection

- Inspection items.
- Protection devices working test.
- Starting ability in normal temperature.
- 50% rated power load moment capability.
- Voltage deviation and speed variation: 0%, 25%, 50%, 75%, 100%, 110% Load.

Painting Process

- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.


2 General Features

- Cummins engine 6LTAA8.9-G2
- Close coupled to a LeroySomer alternator LSA46.3S5
- Microprocessor control module PLC-7420
- NADER main circuit breaker: 400A
- Rotate speed governor: Electrical governor FP801
- Excitation System: Self excited, SHUNT
- A.V.R.Model: AS440
- Key switch
- Emergency stop switch
- ATS (automatic transfer switch) receptacle
- 2x12V/120AH sealed for life maintenance free battery

- Lockable battery isolator switch
- Powder coated canopy
- 50°C radiator
- Oil pump on the engine
- Steel base frame with lifting lug
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Base fuel tank for 12 hours running
- Drain points for fuel tank
- Operation Manual / Specifications

3 Equipment Specification

General technical data

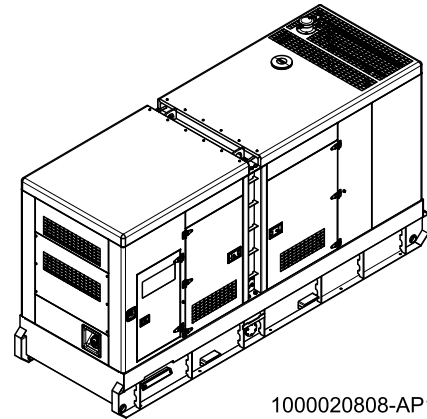


1000020808-AP1-D3

Model.....	GMS250CS			
Structure type	R			
Tank capacity.....	660L			
Dry weight.....	4174g			
Sound pressure level @7m	76.3dB(A)			
Sound power level acc. 2000/14/EC	104.2dB(A)			
Dimensions L×W×H.....	4242×1423×2259mm			
Standby Power	275kVA/220kW			
Prime Power.....	250kVA/200kW			


Voltage	380V	400V	415V	440V	
Ampere	379.8A	360.9A	347.8A	328.0A	
Genset Fuel Consumption					
Frequency/Load	25%	50%	75%	100%	110%
50Hz (L/h)	17.5	29.4	41.3	53.4	58.4

Dck Yf ' GrngY'a

1000098160-AP1-A6

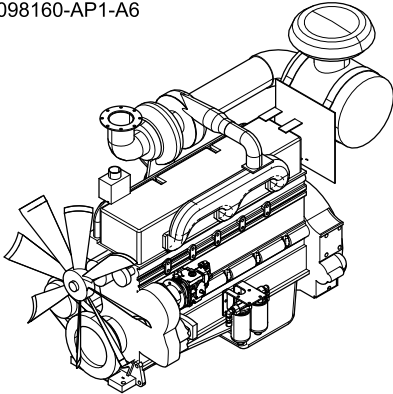


Engine Manufacturer/Brand	Cummins
Engine Model	6LTAA8.9-G2
Dimensions L×W×H.....	1922×816×1597mm
Dry Weigh (approx.)	1380Kg
Number of Cylinders	6
Bore	140mm
Stroke	152mm
Displacement.....	14L
Compression Ratio	15
Type of injection.....	Direct injection
Intake System.....	Turbocharged
Intake Resistance	≤6.22kPa
Cooling System	Water cooled
Fan	Pusher
Battery Voltage	24V
Type of Fuel.....	No.2-D per ASTM D975.
Type of Oil	API CD/SE or CCMCD4
Oil Capacity	38.6L
Type of Coolant	Glycol mixture
Coolant Capacity	60.6L
Back Pressure	≤10kPa
Standby Power	254kW
Prime Power	231kW
Fuel Consumption(100%load).....	191.8g/kW.h

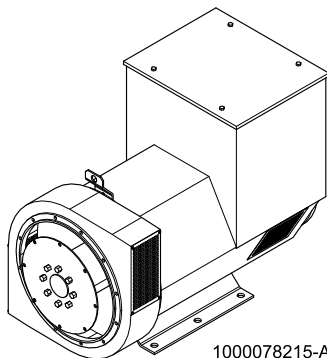

1000078215-AP1-C2

Alternator Manufacturer/Brand	LeroySomer
Alternator Model	LSA46.3S5
Exciter.....	Brushless
Cooling Fan	Cast alloy aluminum
Windings.....	100% copper
Insulation Class	H
Winding Pitch.....	2/3
Terminals	12
Drip Proof	IP23
Altitude.....	≤1000m
Overspeed	2250rpm
Air Flow.....	0.48m³/s(50Hz),0.58m³/s(60Hz)
Voltage Regulation	±0.5%
Total HarmonicTGH / THCat no load < 2.5 % - on load < 2.5%	
Telephone Interference.....	THF<2%;TIF<50

PLC-7420 Control System



1000246165-AP1-A1


PLC-7420 is an advanced control module based on micro-processor, containing all necessary functions for protection of the genset and the breaker control. It can monitor the mains supply, and automatically start the engine when the mains is abnormal. Accurately measure various operational parameters and display all values and alarms information on the LCD. In addition, the control module can automatically shut down the engine and indicate the engine failure.

- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of the mains supply and genset
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable
- Real time clock for time and date display, overall runtime display, 250 log entries
- Overall power output display
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- Communication with PC via RS485 OR RS232 interface, using MODBUS protocol



4 Overall Dimensions

1000020808-DR1-D3


Dry weight	4174kg
Fuel tank capacity	660L
Dimensions L x W x H	4242x1423x2259mm

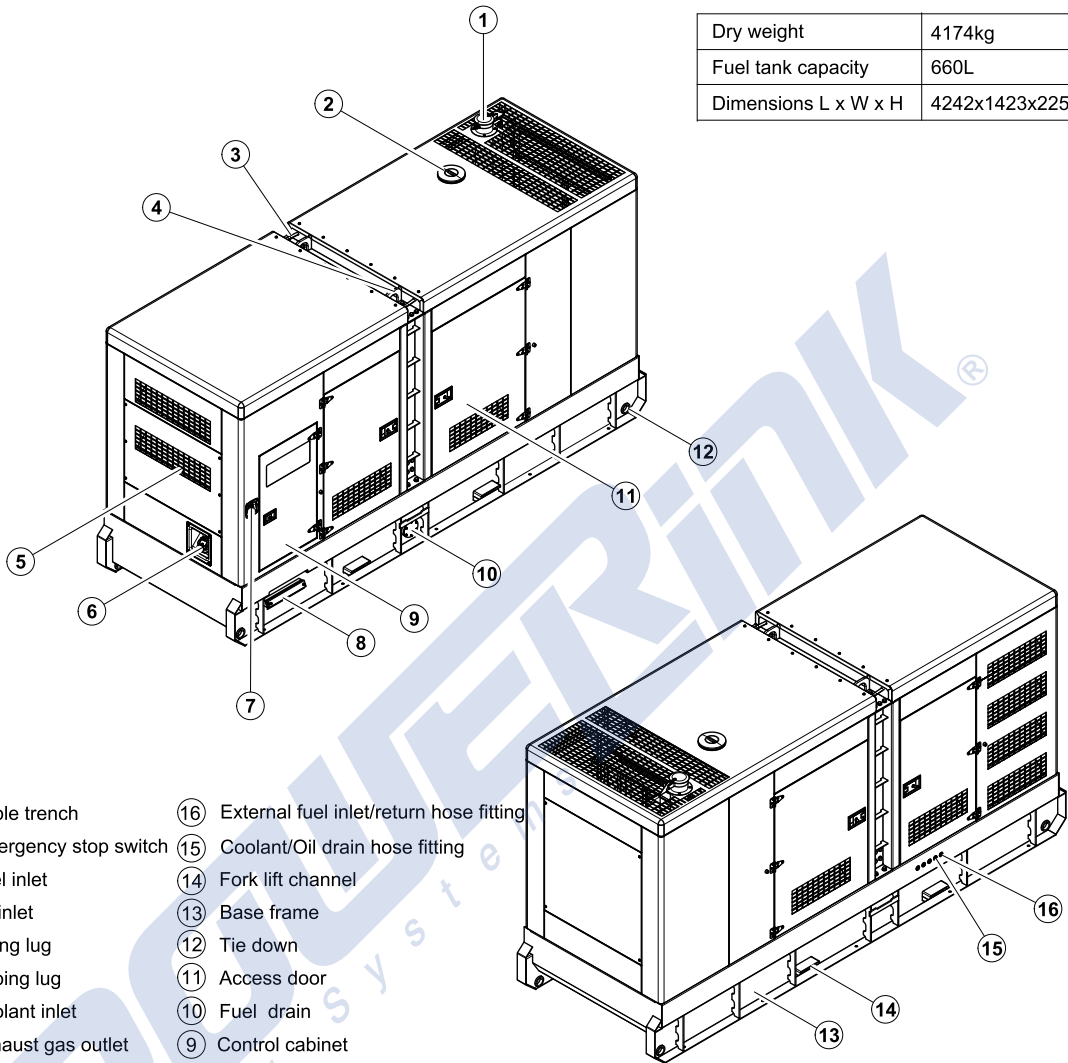


- ⑧ Cable trench
- ⑦ Emergency stop switch
- ⑥ Fuel inlet
- ⑤ Air inlet
- ④ Lifting lug
- ③ Roping lug
- ② Coolant inlet
- ① Exhaust gas outlet
- ⑩ External fuel inlet/return hose fitting
- ⑨ Coolant/Oil drain hose fitting
- ⑭ Fork lift channel
- ⑬ Base frame
- ⑫ Tie down
- ⑪ Access door
- ⑩ Fuel drain
- ⑨ Control cabinet

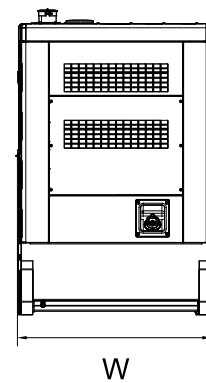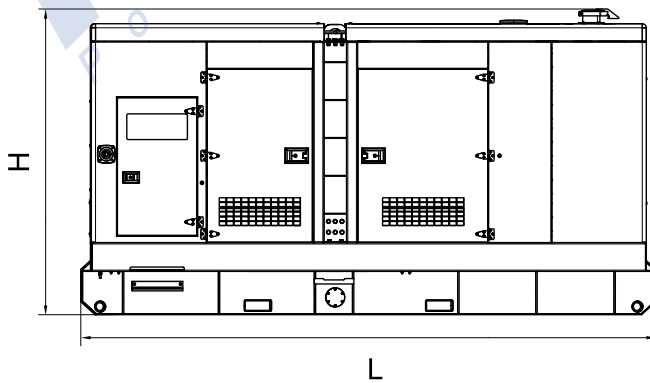

5 Control System

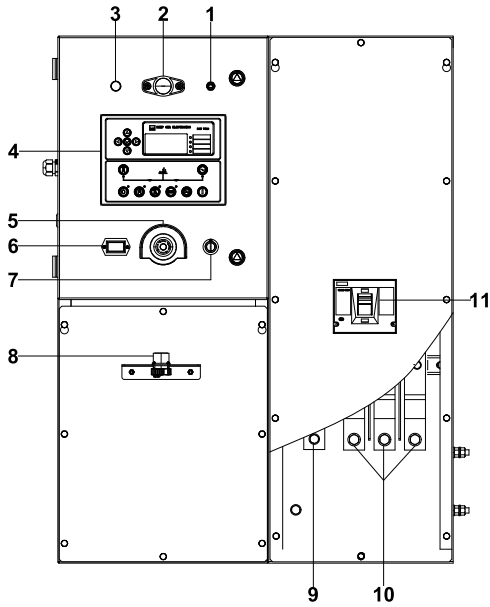

Control & field wiring cabinet

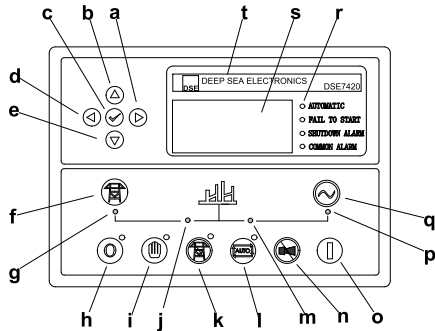

Control module

1000246165-IT1-A1

Ref.	Description
1	Control cabinet lamp switch
2	Charge indicator
3	Control panel lamp
4	Control module
5	Emergency stop switch
6	Time counter
7	Key switch
8	Mains input/Remote control/ ATS communication connector
9	Neutral wire terminal
10	Live wire terminals
11	Main circuit breaker

Ref.	Description
a	Button (next page)
b	Button (increase value / previous item)
c	Button (accept)
d	Button (previous page)
e	Button (decrease value / next item)
f	Button (transfer the load to the mains supply, when in Manual mode only)
g	Mains supply available LED
h	Stop / Reset button
i	Manual button (Manual control mode)
j	Mains supply on load LED
k	Test button (Test mode)
l	Auto button (Auto mode)
m	Genset on load LED
n	Mute/Lamp test button
o	Start button (Manual)
p	Genset available LED
q	Button (transfer the load to the genset, when in Manual mode only)
r	Alarm LED (4 alarm items)
s	LCD display
t	Control module name

1000020808-D3-E

05.2014

POWERLINK[®]
Power Systems

<http://www.powerlinkworld.com>

*Specification may change without prior notice. For more info.,
contact Power Link or your local distributors please.*